

A Study on Applications of Nanotechnology in Civil Engineering

S.Praveen, S. Rajesh and S. Akhil

P.G Scholars, Department of Civil Engineering, James College of Engineering & Technology, Nagercoil, Tamil Nadu, India
E-mail: praveensarvan@gmail.com

Abstract - The role of nanotechnology in conceiving of innovative infrastructure systems has potential to revolutionize the civil engineering practice. This paper first presents an overview of nanotechnology and civil engineering in general and their interdisciplinary approach. Further the Nano-materials and their applications in civil engineering field across its different sections are exemplified. The properties like self-sensing, self-rehabilitation, self-structural health monitoring, self-vibration damping, self-cleaning and self-healing are studied. Following this the analysis were carried out in ductile structural composites along with its enhanced properties, low maintenance coatings, better properties of cementitious materials, reduction of the thermal transfer rate of fire retardant and insulation, various Nano sensors, smart materials, intelligent structure technology etc. And also the possible consequences regarding its practicality and the most challenging economic factors concerned are discussed briefly. Finally its future trend and potential towards more economical, sustainable & eco-friendly infrastructure having longer durability are elucidated.

Keywords: Nano, Micro, Applications, Materials

I.INTRODUCTION

As people involved in construction, we are very familiar with the concept of getting raw materials, bringing them together in an organized way and then putting them together into a recognizable form. The finished product is a passive machine. It works and slowly decays as it is used and abused by the environment and the owners of the project. Construction then is definitely not a new science or technology and yet it has undergone great changes over its history.

In the same vein, nanotechnology is not a new science and it is not a new technology either. It is rather an extension of the sciences and technologies that have already been in development for many years. The size of the particles is the critical factor. At the Nano scale, material properties are altered from that of larger scales. It is these "Nano-effects", however, that ultimately determine all the properties that we are familiar with at our "macro-scale" and this is where the power of nanotechnology comes in – if we can manipulate elements at the Nano scale we can affect the macro-properties and produce significantly new materials and processes.

II.BACK GROUND OF NANOTECHNOLOGY

Nano, which comes from the Greek word for dwarf, indicates a billionth. One nanometer is a billionth of a meter. Definitions of 'nanotechnology' vary, but it generally refers to understanding and manipulation of matter on the Nano scale, say, from 0.1 nm to 100 nm. The significance and importance of controlling matter at the Nano scale is that at this scale different laws of physics come into play like quantum physics. There are two ways to approach the Nano scale: shrinking from the top down, or growing from the bottom up. The 'top down' approach entails reducing the size of the smallest structures towards the Nano scale by machining and etching techniques, whereas the 'bottom up' approach, often referred to as molecular nanotechnology, implies controlled or directed self-assembly of atoms and molecules to create structures.

III.NANOTECHNOLOGY IN CONSTRUCTION

The construction industry was the only industry to identify nanotechnology as a promising emerging technology in the UK Delphi survey in the early 1990s. The importance of nanotechnology was also highlighted in foresight reports of Swedish and UK construction. Furthermore, ready mix concrete and concrete products were identified as among the top 40 industrial sectors likely to be influenced by nanotechnology in 10-15 years. However, construction has lagged behind other industrial sectors where nanotechnology R&D has attracted significant interest and investment from large industrial corporations and venture capitalists. Recognizing the huge potential and importance of nanotechnology to the construction industry, the European Commission in late 2002 approved funding for the Growth Project GMA1-2002-72160 "NANOCONEX" - Towards the setting up of a network of excellence in nanotechnology in construction.

Applications Of Nanotechnology In Civil Engineering

Nanotechnology can be used for design and construction processes in many areas since nanotechnology generated products have many unique characteristics. These characteristics can, again, significantly fix current construction problems, and may change their requirement and organization of construction process.

Some of its applications are examined in detail below:

Concrete

Concrete is one of the most common and widely used construction materials. Nanotechnology is widely used in studying its properties like hydration reaction, alkali silicate reaction (ASR) and fly ash reactivity. Alkali silicate reaction is caused due to alkali content of cement and silica present in reactive aggregates. The use of pozzolona in the concrete mix as a partial cement replacement can reduce the likelihood of ASR occurring as they reduce the alkalinity of a pore fluid.

Fly ash not only improves concrete durability and strength but also sustainable factors by reducing the requirement for cement, however, the curing process of such concrete is slowed down due to the addition of fly ash and early stage strength is also low in comparison to normal concrete. Addition of Nano-silica leads to the densifying of the micro and nanostructure resulting in improved mechanical properties. With the addition of nano-silica part of the cement is replaced but the density and strength of the fly-ash concrete improves particularly in the early stages. For concrete containing large volume fly ash, at early age it can improve pore size distribution by filling the pores between large fly ash and cement particles at Nano scale. The dispersion/slurry of amorphous nano-SiO₂ is used to improve segregation resistance for self-compacting concrete.

The addition of small amount of carbon nanotube (1%) by weight could increase both compressive and flexural strength. This can also improve the mechanical properties of samples consisting of the main portland cement phase and

water. Addition of 1% of Oxidized multi-walled nanotubes (MWNT's) show the best improvements both in compressive strength (+ 25 N/mm²) and flexural strength (+ 8 N/mm²) compared to the reference samples without the reinforcement.

Cracking is a major concern for many structures. University of Illinois Urbana-Champaign is working on healing polymers, which include a microencapsulated healing agent and a catalytic chemical trigger. When the microcapsules are broken by a crack, the healing agent is released into the crack and contact with the catalyst. The polymerization happens and bond the crack faces. The self-healing polymer could be especially applicable to fix the micro cracking in bridge piers and columns. But it requires costly epoxy injection.

Research has shown that an anaerobic (one that does not require oxygen) microorganism incorporated into concrete mixing water results in a 25% increase in 28-day strength. The *Shewanella* microorganism was used at a concentration of 10⁵ cells/ml and Nano scale observation revealed that there was a deposition of sand-cement matrix on its surface. This led to the growth of filler material within the pores of the cement sand matrix and resulted in increased strength.

Finally, fibre wrapping of concrete is quite common today for increasing the strength of pre-existing concrete structural elements. Advancement in the procedure involves the use of a fibre sheet (matrix) containing Nano-silica particles and hardeners. These nanoparticles penetrate and close small cracks on the concrete surface and, in strengthening applications, the matrices form a strong bond between the surface of the concrete and the fibre reinforcement.

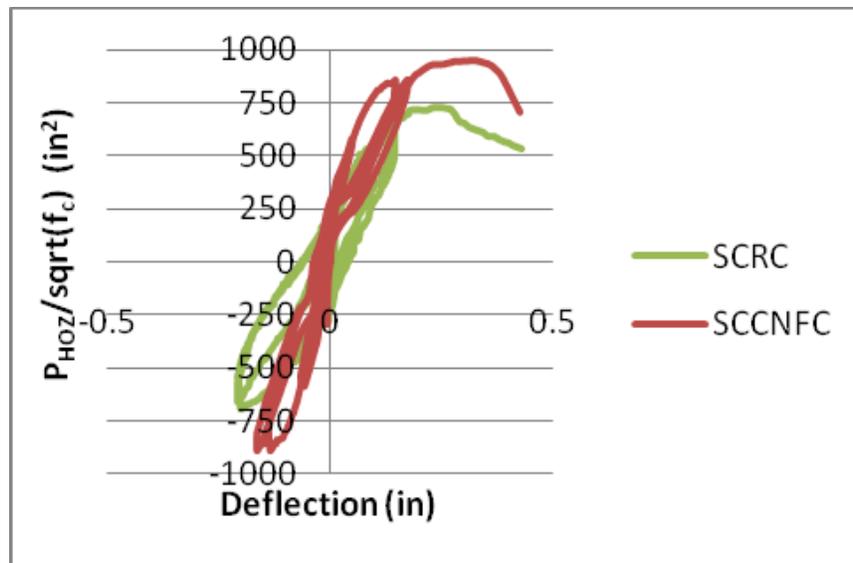


Fig. 1 Horizontal Force vs. Displacement Curves

It is evident from the Fig.1 that the SCCNFC (self-consolidating carbon Nano fibre concrete) column failed at higher loads and with larger deflection than the SCRC (steel

confined reinforced concrete) column. Additionally, the SCCNFC column was much stiffer than the SCRC column and exhibited higher energy dissipation. SCCNFC can also

be used as a type of self- Structural Health Monitoring system

Structural Composites

Steel is a major construction material. FHWA together with American Iron and Steel Institute and the U.S. Navy developed new, low carbon, high-performance steel (HPS) for bridges in 1992 with higher corrosion-resistance and weld ability by incorporating copper nanoparticles from at the steel grain boundaries .

SandvikNanoflex™ is new stainless steel developed by SandvikNanoflex Materials Technology. Due to its high performance, it is suitable for application which requires lightweight and rigid designs. Its good corrosion, formability and wear resistance can keep life-cycle costs low MMFX2 is nanostructure-modified steel, produced by MFX Steel Corp, USA. Compared with the conventional steel, it has a fundamentally different microstructure-laminated lath structure resembling “plywood” as shown in

Fig.2. Due to the modified nanostructure, MMFX steel has superior mechanical properties, e.g. higher strength, ductility and fatigue resistance, over other high-strength steels. These material properties can lead to longer service life in corrosive environments and lower construction costs. The MMFX2 steel has similar corrosion resistance to that of stainless steel, but at a much lower cost. So far, the MMFX steel has gained certification for use in general construction throughout the US.

Carbon nanotubes are over 100 times stronger than steel and only one-sixth of the weight in addition to its high thermal and electrical conductivities. A CNT composite has recently been reported to be six times stronger than conventional carbon fibre composites. Additionally, unlike carbon fibres which fracture easily under compression, the nanotubes are much more flexible and can be compressed without fracturing. CNT composite reinforced structures have a 50 to 150-fold increase in tensile strength, compared with conventional steel-reinforced structures.

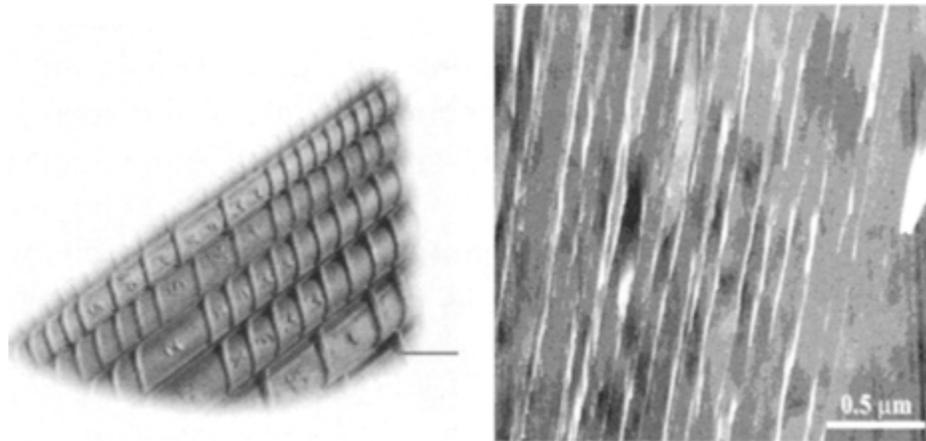


Fig.2 Nanostructure modified steel reinforcement
TEM picture showing microstructure of Nano sheet of austenite in a carbide free lath of Martensite

Coatings

The coatings incorporate certain Nano particles or Nano layers have been developed for certain purpose including: protective or anti-corrosion coatings for components; self-cleaning, thermal control, energy saving, anti-reflection coatings for glass/windows; easy-to-clean, antibacterial coatings for work surfaces; and more durable paints and anti-graffiti coating for buildings and structures. For example:

Self-cleaning windows have been developed and marketed by Pilkington, St. Gobain Co., and others. This coating works in two stages. First, using a 'photocatalytic' process,

nanosized TiO₂ particles in the coating react with ultra-violet rays from natural daylight to break down and disintegrate organic dirt. Secondly, the surface coating is hydrophilic, which lets rainwater spread evenly over the surface and 'sheet' down the glass to wash the loosened dirt away. It can therefore reduce airborne pollutants when applied to outdoor surfaces. Coating of 7000 m² of road surface with such a material in Milan in 2002 has led to a 60% reduction in nitrogen oxides concentration at street level. Research has also demonstrated that bimetallic Nano particles, such as Fe/Pd, Fe/Ag, or Zn/Pd, can serve as potent reductants and catalysts for a large variety of environmental contaminants.

Another approach to create self-cleaning surface coating has been the development of 'Lotus Spray' products by BASF, based on ideas of replicating the spotless lotus leaves by incorporating silica and alumina nanoparticles and hydrophobic polymers. The product offers 20 times more water-repellent property than a smooth, wax coating. With its applications in the construction industry, the company aims to develop a product that will retain its lotus effect even after an abrasion with sandpaper.

Special coatings can also make the applied surface both hydrophobic and oleo phobic at the same time. These could be used for anti-graffiti surfaces, carpets and protective clothing etc. Researchers in Mexico has successfully developed a new type of anti-graffiti paint DELETUM, by functionalizing nanoparticles and polymers to form a coating repellent to water and oil at the same time, as shown in Fig. 3.

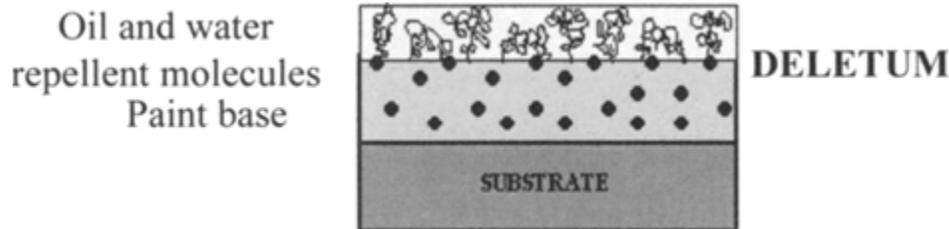


Fig. 3. Stratigraphy of Deletum anti-graffiti coating.

As a result, the coated surface is non-stick or very easy to clean, and able to withstand repeated graffiti attacks. Furthermore nanostructured coatings can be used to selectively reflect and transmit light in different wavebands. Research is focusing on smart and responsive materials able to sense and adapt to surroundings and change their appearance, such as whose colour changes as a function of temperature, and cladding which responds to heat and light to minimize energy use in buildings.

Glass

Fire-protective glass is another application of nanotechnology. This is achieved by using a clear intumescent layer sandwiched between glass panels (an interlayer) formed of fumed silica (SiO_2) nanoparticles which turns into a rigid and opaque fire shield when heated. The electrochromic coatings are being developed that react to changes in applied voltage by using a tungsten oxide layer; thereby becoming more opaque at the touch of a button. Because of the hydrophobic properties of TiO_2 , it can be applied in antifogging coatings or in self-cleaning windows. Nano- TiO_2 coatings can also be applied to building exteriors to prevent sticking of pollutants, and thus reduce a facility's maintenance costs.

Nanotechnology in Fire Protection

Fire resistance of steel structures is often provided by a coating of spray on cementitious process which is no more popular because they need to be thick, tend to be brittle and polymer additions are needed to improve adhesion. However, research into nano-cement (made of nano-sized particles) has the potential to create a new paradigm in this area of application. This is achieved by the mixing of carbon nanotubes (CNT's) with the cementitious material to fabricate fibre composites that can inherit some of the outstanding properties of the nanotubes such as strength. Polypropylene fibres are also being considered as a method of increasing fire resistance and this is a cheaper option than

conventional insulation. CNTs can also be used to produce protective clothing materials because of their flame retardant property.

IV. IMPACTS OF NANOTECHNOLOGY ON CONSTRUCTION

Merits

1. Compared with conventional TiO_2 , TiO_2 at the Nano-scale experiences a 500% increase in surface area and a 400% decrease in opacity. Current nano- TiO_2 production levels have reached approximately 4 million metric tons at a price of approximately \$45/kg to \$50/kg vs. \$2.5/kg for conventional TiO_2 .
2. The CNT market worldwide is expected to grow from \$51 million in 2006 to more than \$800 million by 2011.
3. Nano-modified concrete cuts down construction schedules while reducing labor-intensive (and expensive) tasks. Also it can reduce the cost of repair and maintenance.
4. The paint and coatings industry consists of approximately annual sales of \$20 billion (Baer et al. 2003). Nano-alumina and titania have a four- to six-fold increase in wear resistance, with doubled toughness and bond strength.
5. The potential global market of Nano composites is estimated at \$340 billion for the next two decades.
6. The market for fire protection systems totaled approximately \$45 billion in 2004 and is expected to grow to more than \$80 billion by 2010.
7. Self-repairing asphalt, healing and rejuvenating Nano agents for asphalt and self-assembling polymers improve asphalt mix.
8. Nano sensors embedded in infrastructural materials can provide, at minimum cost, fully integrated and self-powered failure prediction and forecasting mechanisms for high-capital structures e.g., reservoirs, nuclear power plants, and bridges.

Demerits

1. Nano particles being very small in size have the potential to negatively affect the respiratory and digestive tracks and the skin or eye surface thus exposes workers to hazards.
2. Since nanotechnology-related industries are relatively new, the type of worker who is employed in construction research and development or even some field applications must have an interdisciplinary background.
3. New policies in the context of nanotechnology will require cooperation between various levels of government, R&D agencies, manufacturers, and other industries.
4. Small production volumes and high cost remain the main barriers to the use of nanotechnology.
5. The time for commercializing a product is long. E.g. the concrete, which can eliminate the need for reinforcing bars, is projected to be commercialized by approximately 2020.

V. SUSTAINABLE CONSTRUCTION PRACTICES

At an annual production rate of 2.35 billion tons, the cement industry contributes about 5% to global anthropogenic CO₂ emissions. Additives such as belite, calcium sulfo-aluminate and calcium alumino-ferrite (BASF 2008) have been found to reduce the CO₂ emissions by nearly 25% in the production phase

A wall made of Nano-modified concrete during a cold weather season could potentially be used as a thermal insulator when the outside temperature falls or used as a

conductor when the ambient temperature inside the building is low, thereby reducing the energy load required for conditioning the building interior.

With further development of LED & OLED technology and progress in the insulating materials and smart glazing, the vision for buildings to meet their own energy requirement will become a reality.

VI. FUTURE PROJECTION OF NANOTECHNOLOGY IN CONSTRUCTION

There is substantial money flowing into Nano-related research from multinational corporations and venture capital investments. Many of the world's largest companies such as IBM, Intel, Motorola, Lucent, Boeing, Hitachi, etc. have all had significant Nano-related research projects going on, or launched their own nanotech initiatives. By 2015, the National Science Foundation estimates that nanotechnology will have a \$1 trillion effect on the global economy. To achieve this market-sized prediction, industries will employ nearly two million workers towards advancements in many Nano materials, Nano structures, and Nano systems. The time needed for commercializing a product is long because industries may prefer monitoring development in research agencies and laboratories before making substantial investments. Furthermore, nanotechnology development, particularly in conjunction with biomimetic research will lead to truly revolutionary approaches to design and production of materials and structures with much improved efficiency, sustainability and adaptability to changing environment.

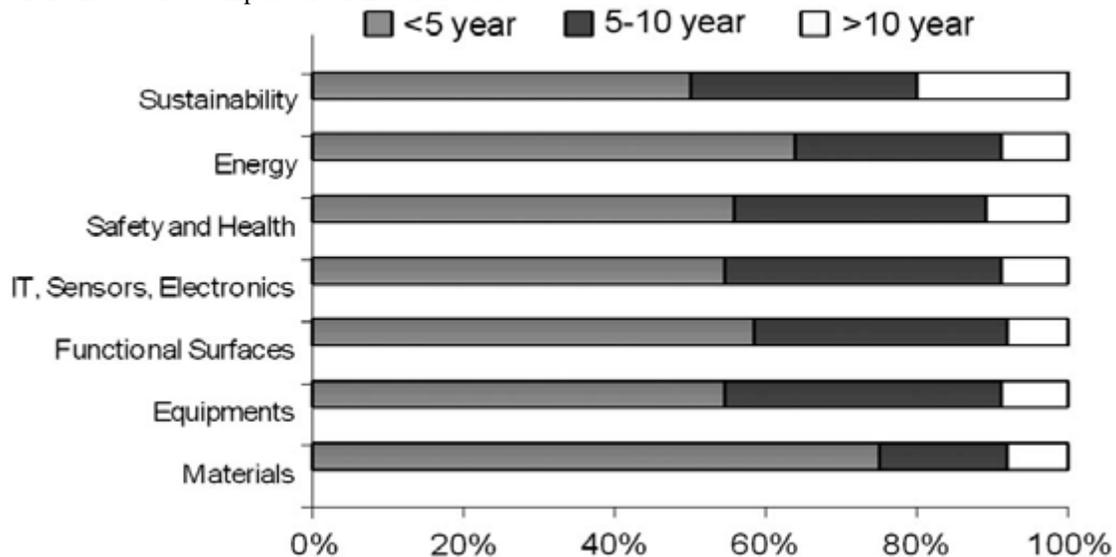


Fig. 4 Expected successful implementation of nanotechnology products in construction

VII. CONCLUSION

Research in nanotechnology that is related to construction is still in its infancy; however, this paper has demonstrated the main benefits and barriers that allow the effect of nanotechnology on construction to be defined. Recent years

of R&D have shown massive investments in Nano-construction. The activities in Nano related products for the construction industry are not well marketed and are difficult for industry experts to identify. A large-scale and visible initiative from Nano-science and nanotechnology in the construction area could help seed construction related Nano-

technological development. Focused research into the timeous and directed research into nanotechnology for construction infrastructure should be pursued to ensure that the potential benefits of this technology can be harnessed to provide longer life and more economical infrastructure. This paper concludes with a roadmap and strategic action plan on how nanotechnology can have its biggest impact on the field of civil engineering.

REFERENCES

- [1] ASCE. (2005). "Report card for America's infrastructure. American society of civil engineers." (<http://www.asce.org>) (Mar. 8, 2008).
- [2] Baer, D. R., Burrows, P. E., and El-Azab, A. A. (2003). "Enhancing coating functionality using Nano science and nanotechnology." *Prog. Org. Coat.*, 47(3-4), 342-356.
- [3] Balaguru, P. N., "Nanotechnology and Concrete: Background, Opportunities and Challenges." *Proceedings of the International Conference – Application of Technology in Concrete Design*, Scotland, UK, p.113-122, 2005.
- [4] European Scientific Journal vol. 8, No.27 ISSN: 1857 – 7881
- [5] Li, Hui, Mao-hua Zhang, and Jin-ping Ou. "Abrasion resistance on concrete containing nanoparticles for pavement." *Wear* 260, no. 11-12 (2006): 1262-1266.
- [6] MMFX Steel Corporation of America, <http://www.rarffxsteel.com>
- [7] Nano Pore Incorporated, <http://www.nanopore.com>
- [8] Shah, S. P., and A. E. Naaman. "Mechanical Properties of Glass and Steel Fiber Reinforced Mortar." *ACI Journal* 73, no. 1 (Jan 1976): 50-53.
- [9] St. Gobain, <http://www.saint-gobain.com>
- [10] World Technologies and Services (WTEC). (1998). "R&D status and trends in nanoparticles, nanostructured materials, and Nano devices." WTEC Rep. on Nanostructure Science and Technology, International Technology Research Institute, Loyola College, Baltimore.